



INDUSTRIAL SOLUTIONS

by
synerji
ELECTRICAL

LED HIGH-BAY

INTRODUCTION



The Synerji Led Linear High Bay has an Aluminium Body and Polycarbonate lens, providing a beam angle of 90°. It features a Meanwell Driver and Philips lumileds Chips. IP65 ingress protection rating, IK07 impact protection rating and 50000 hours of lamp life, the fitting offers a high value solution for Industrial Lighting applications. Hanging brackets included for easy installation. The fitting is Non-Dimmable.

IES files are available for lighting designs. All Synerji floodlights comply with the IEC 60598 standard.

LINEAR - 150W

SYFLHLN150DL

- Power:** 150W
- Voltage:** AC220-240V 50HZ
- Light efficiency:** 25200Lm
- PF >** 0.95
- Daylight:** 6500K
- Beam angle:** 90°
- IP Rating:** IP65
- Material:** Aluminium
- Colour Temperature:** 6500K
- Warranty:** 3 years

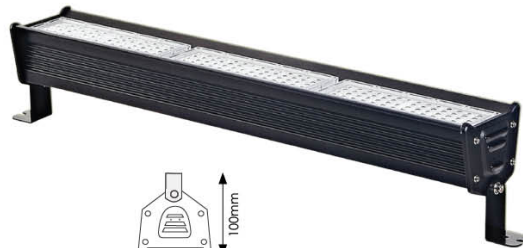

6500K DAYLIGHT	25200lm LUMENS	220-240V 50/60Hz	0.95 POWER FACTOR
--------------------------	--------------------------	----------------------------	-----------------------------

