

ELECTRICAL SOLUTIONS

by
synerji
ELECTRICAL

PVC DISTRIBUTION BOARDS SURFACE

INTRODUCTION

Our flush and surface Dinrails / Distribution boards are available in 4, 6, 8, 10, 12, 15, 18, 24 and 36-way configurations to suit diverse installation needs. Built with a sturdy ABS box shell and durable PC door, they provide dependable performance and protection.

Perfect for residential, commercial, and industrial applications, Synerji DIN rails ensure efficiency and flexibility in electrical setups.

36 WAY IP40 DINRAIL - SURFACE MOUNT



SYDB36WSURDIN

Approval: CE, RoHS, HF test, IK test, ISO9001

IP Rating: IP40

IK Rating: IK08

Material: ABS;

Ambient temperature (°C): -5~+40,
50% humidity permitted under max +40°C

Colour: White Body & Smokey Lid

Fire resistance: 650°C/30s

Rated Voltage: 400VAC/1000V DC


Rated Current: 125A

Terminal Block: Copper


Included: C/W Earth & Neutral Bar



DIMENSIONS

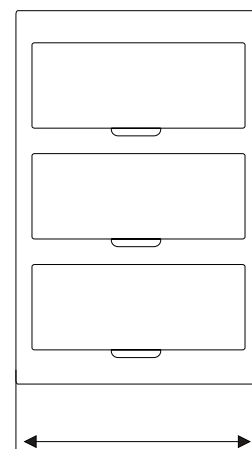

270mm

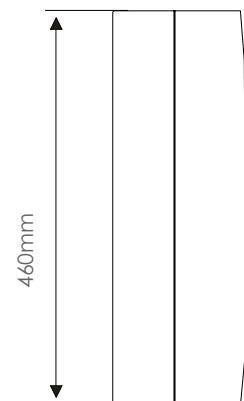

460mm

100mm