

FLOODLIGHTS

by
synerji
ELECTRICAL

LED SLIM FLOODLIGHT

INTRODUCTION

Synerji LED Slim Floodlights deliver durable, efficient, and versatile lighting across a range of wattages to suit many applications. Available in 10W, 20W, 30W, 50W, 100W, 150W, and 200W, they are designed with a robust aluminium body, tempered glass, and stainless-steel fittings for reliable long-term performance. A wide 120° beam angle provides broad, even coverage, making them ideal for both residential and commercial outdoor spaces. With a lifespan of up to 35,000 hours, the Synerji Slim Floodlight range offers a dependable and cost-effective solution for lighting everything from gardens and driveways to large industrial areas and sports fields.

LED SLIM FLOODLIGHT IP65 - 30W

SYFL030WW WW - 3000K

SYFL030CW CW - 4000K

SYFL030DL DL - 6500K

Wattage: 30W

Lumens: 3 600 lm

Lumen Efficacy: ±120 lm/W

Voltage: 220–240V ~ 50Hz

LS: 35 000 hrs

Material: Aluminium body with tempered glass and stainless-steel screws

IP Rating: IP65

CRI (Ra): 80


PF: 0.95

Beam Angle: 120°


Humidity Range: 10–90%

Operating Temperature: -20°C to +45°C

Features: Adjustable 304 stainless steel mounting bracket, 4000V surge protection

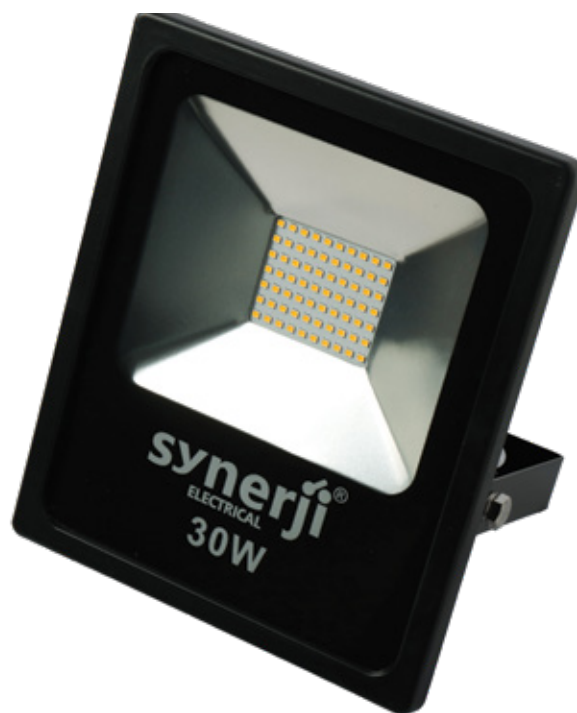

DIMENSIONS

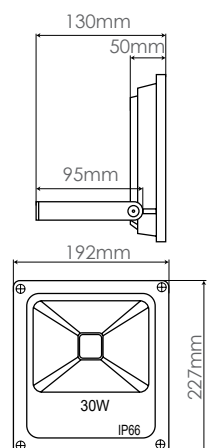

NB - MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.